

Download the latest installation sheets via the official website or QR code.

HCFA W

5

Zhejiang Hechuan Technology Co.,Ltd
No.5, Qinshan Road, Longyou Industrial Zone, Quzhou City, Zhejiang Province

07060201-0839-001
Date 2025-12-29
CN
EN Instruction Sheet

1. Safety precautions

The products in this manual are industrial products and are all open-type housing designs. It is essential to install these products within a control cabinet that is safeguarded against dust, moisture, and accidents such as electric shocks or physical impacts. Additionally, protective measures must be taken to prevent malfunctions or damage caused by improper operation or accidents involving non-maintenance personnel. Failure to do so may lead to serious risks to personnel safety and potential loss of property.

2. Model identification

HC		MXB		- ID04		- 200		- BD		- XXXX	
1		2		3		4		5		6	
HC		Hechuan Technology)		ID04		4 (4-channel standard input)		BD		BD Optional BD card)	
MXB		M M-Series optional expansion		OD04		4 (4-channel standard output)					
				200		M200 M200 series optional card		XXXX		0-9/A-Z/ (N/A)	
								PNP		Source type	

3. Applicable model

Digital input expansion card	HCMXB-ID04-200-BD	HCM211-20MR-A HCM211-20MT4-A	4	NPN PNP	4-channel digital input, supports NPN and PNP
Digital output expansion card	HCMXB-OD04-200-BD	HCM211-32MR-A HCM211-32MT6-A HCM211-42MR-A HCM211-42MT8-A	4	NPN	4-channel digital output, chip output, supports NPN
	HCMXB-OD04-200-BD-PNP	HCM211-60MR-A HCM211-60MT10-A HCM212-32MT4-A HCM212-60MT8-A	4	PNP	4-channel digital output, chip output, supports PNP

* 1 2

*Note: The digital expansion card can be installed in the host expansion slot 1 or 2, with a maximum of two installable (supporting single-slot or dual-slot installation).

4. General electrical and environmental specifications


HCMXB-ID04-200-BD	DC3.3V/0.1W	DC3.3V/0.1W	DC24V, 5mA/Ch	Digital input: DC24V, 5mA/Ch
HCMXB-OD04-200-BD			DC24V, 500mA/Ch, 2A/4Ch*3 / /	Digital output: DC24V, 500mA/Ch, 2A/4Ch*3 Load type: Resistive/Inductive/Lamp loads
HCMXB-OD04-200-BD-PNP			DC24V, 500mA/Ch, 2A/4Ch*3 / /	Digital output: DC24V, 500mA/Ch, 2A/4Ch*3 Load type: Resistive/Inductive/Lamp loads

- * 1. LPS SELV
2.
3.

*Note: 1. All models can only operate under the safety extra low voltage (SELV) provided by a limited power source (LPS).
2. The power rating indicated here is the maximum power under full-load operation.
3. Consider the effect of temperature rise and derate during using.

Altitude	≤2000m	≤ 2000m
Operating environment		Installation within a control cabinet, open-type and indoor use
Operating temperature	0~55	0~55
Storage temperature	-25~70	-25~70
Ambient humidity	10~95%RH	10~95%RH (non-condensing)
Vibration resistance	5~150Hz X/Y/Z 1g/3.5mm	5~150Hz (X/Y/Z axes, 1g/3.5mm displacement)
Pollution degree	2	Level 2
Cooling method		Natural air cooling
IP rating	IP20	IP20
Enclosure material		Self-extinguishable

*Note: If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.

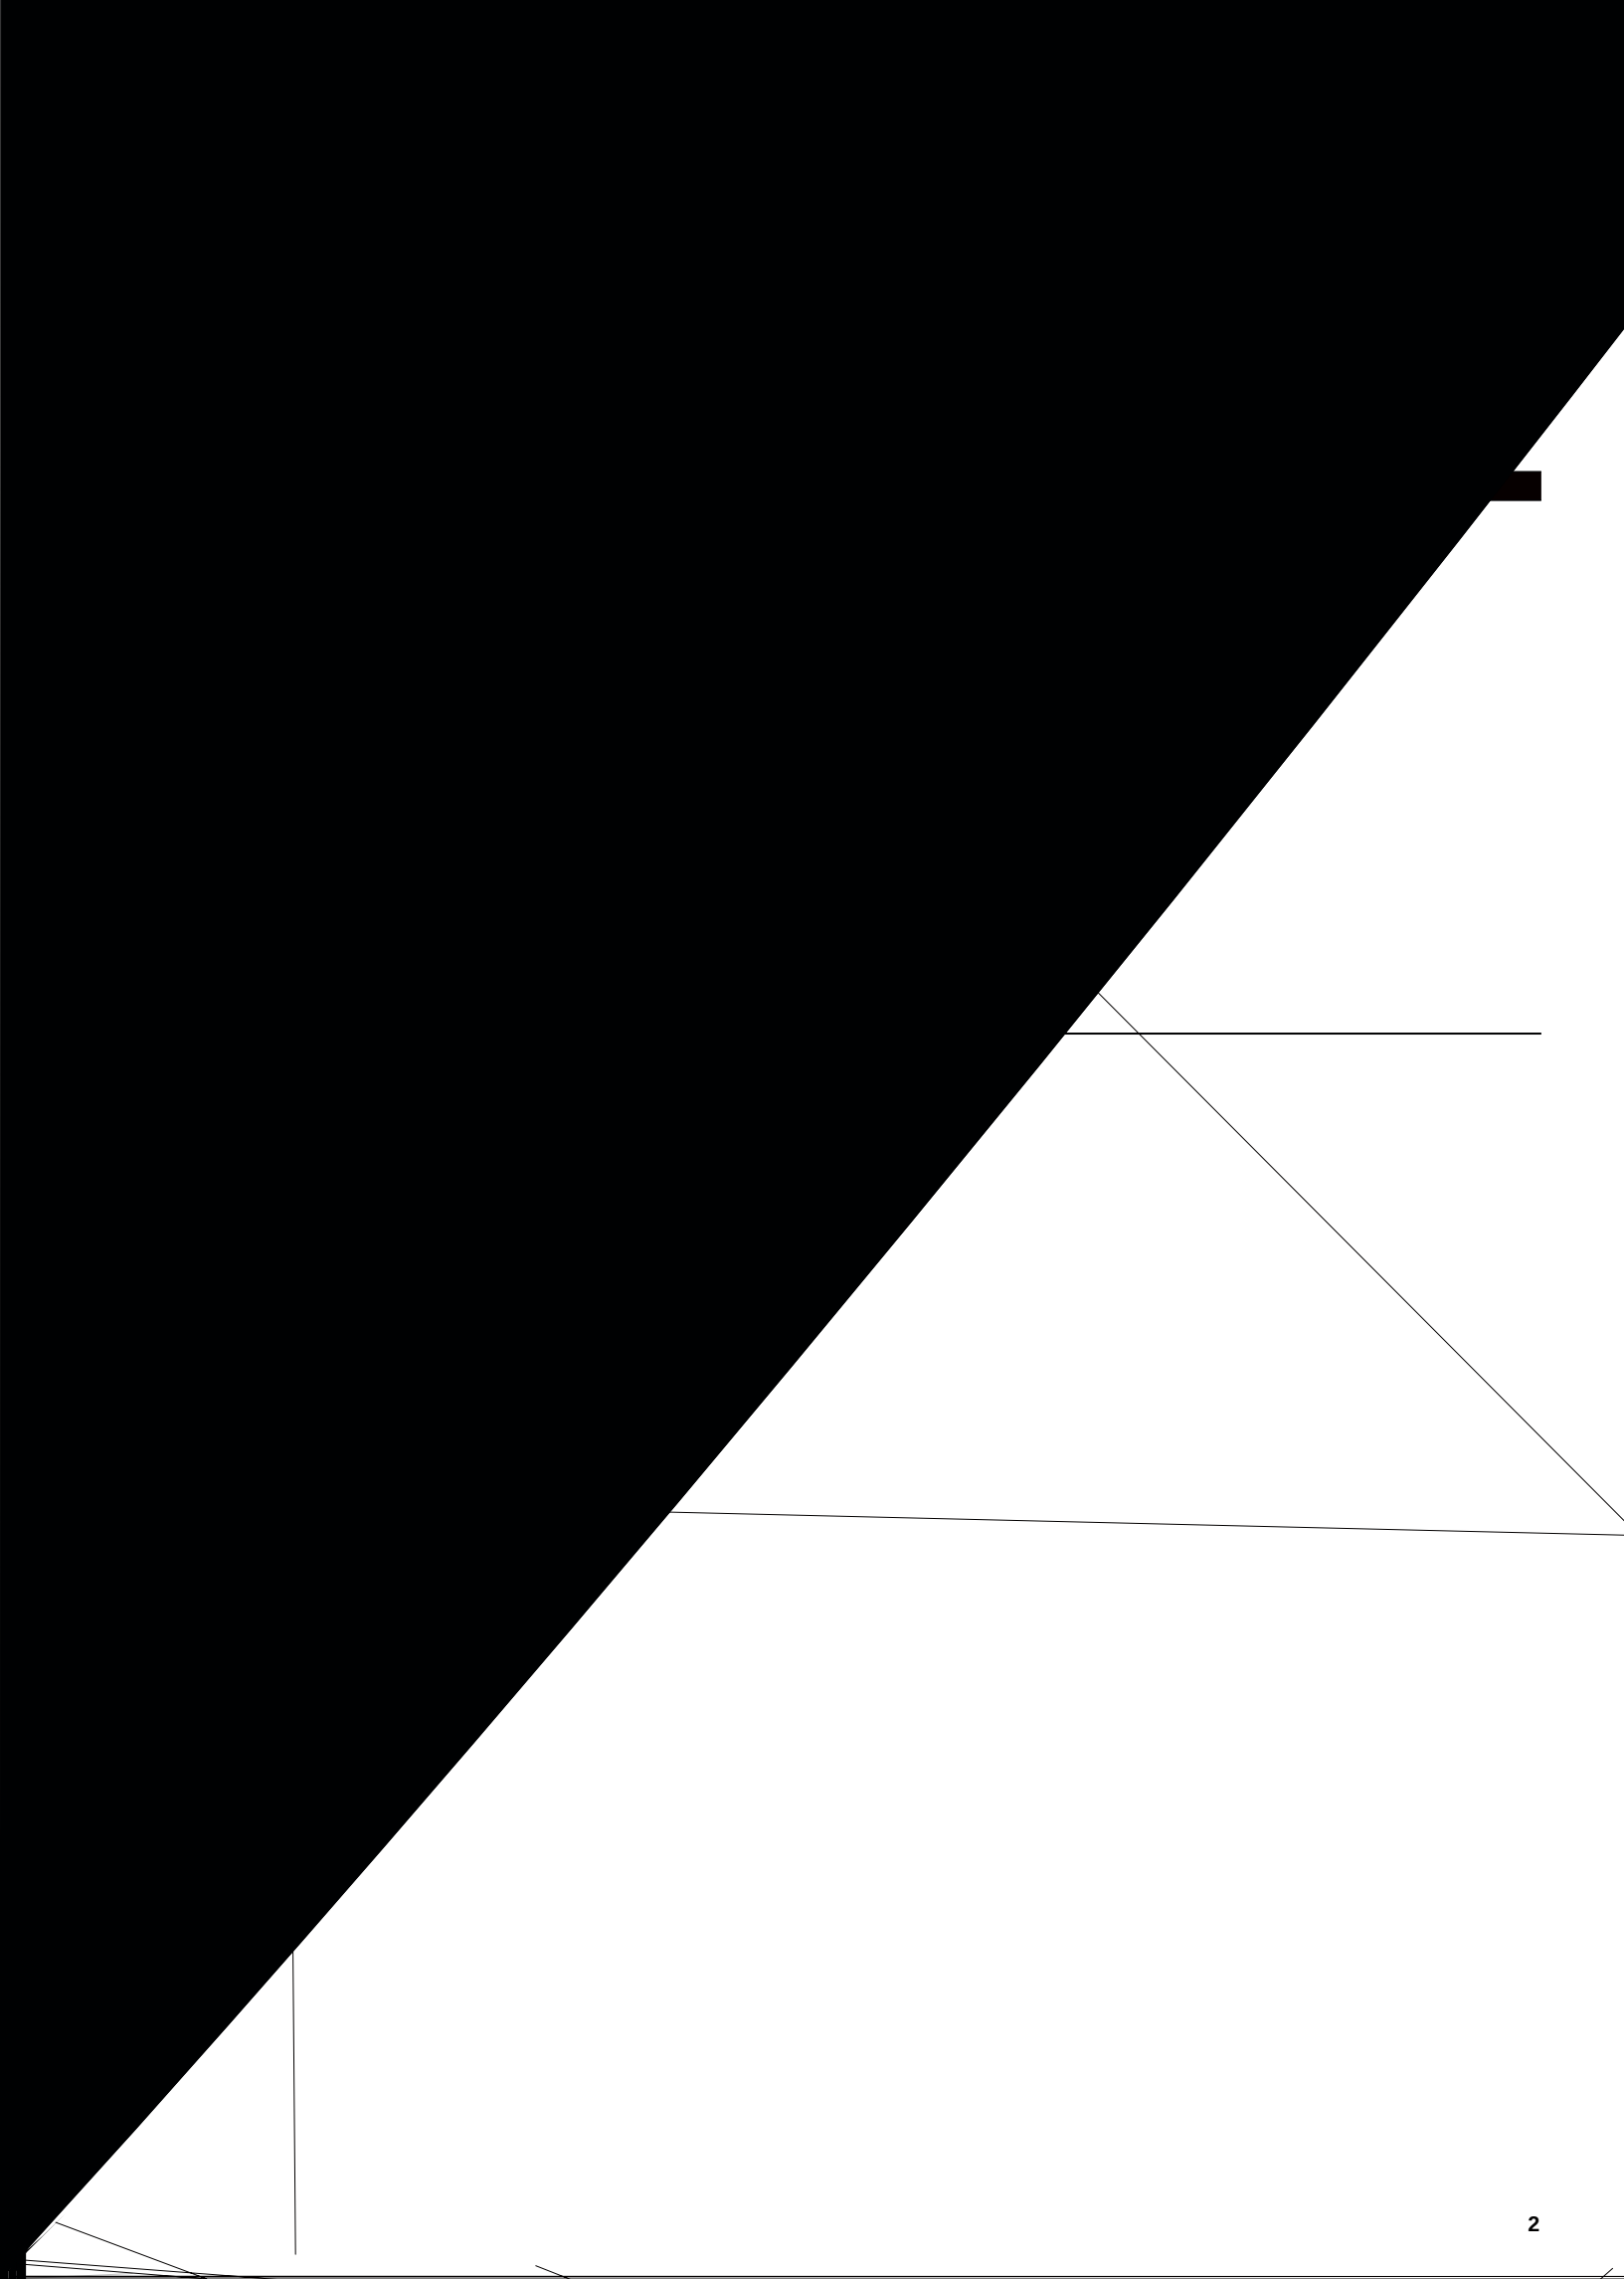

7. Indicator description

N (0-3)	(Input)				
			(Green)		
					
N (0-3)			Not lit	N	There is no output signal for this channel
			Lit	N	There are output signals for this channel

8. Terminal and wiring description

(Input)	NPN				-	-
	PNP				-	-
(Output)	NPN		-			-
	PNP		-		-	

*Note: The symbol " " indicates that the type is supported. The symbol "-" indicates that the type is not supported.

0		0				
Digital input channel 0						